

UTTERMOST



ASSEMBLY INSTRUCTIONS

STYLE#: 21328

Carefully unpack all lamp parts from the carton.

1. Take the lamp carefully out of the Carton, and place it on a flat surface.
2. Be sure the power to the installation point is turned off. This lamp must be installed on reinforced Outlet Box.
3. Fasten the **Cross bar** to the **outlet box**. Secure the **Nipple** onto the **Canopy** with **Loop #1**.
4. Adjust chain length as needed. Thread **Quick Link#1** into **Loop #1** on the Canopy, then **Quick Link #2** into Loop #2 on the **Lamp Body**. Hand tighten until snug.
5. Pass the supply wires through the **Canopy** and the hole in the middle of the **Cross Bar**.
6. The power supply wire consists of three wires, one black wire, one white wire and one silver ground wire.
Connect the wires as shown. A. Connect the House Ground Wire to the Fixture Ground Wire.
B. Connect the House White (or Ribbed) Wire to the Fixture Supply Wire (White or Ribbed Side).
C. Connect the House Black (or Red) Wire to the Fixture Supply Wire (Black or Smooth Side).
D. Wrap each connected wire with Wire Connector and carefully stuff all of the connected wires into the Outlet Box.
7. Put the **Glass Shade** onto the **Shade Base** separately with care.
8. Install the correct **Edison Bulb** (Included) onto the **Socket** referring to fixture markings and/or labels for maximum wattage.

Your installation is completed now. Restore electricity.

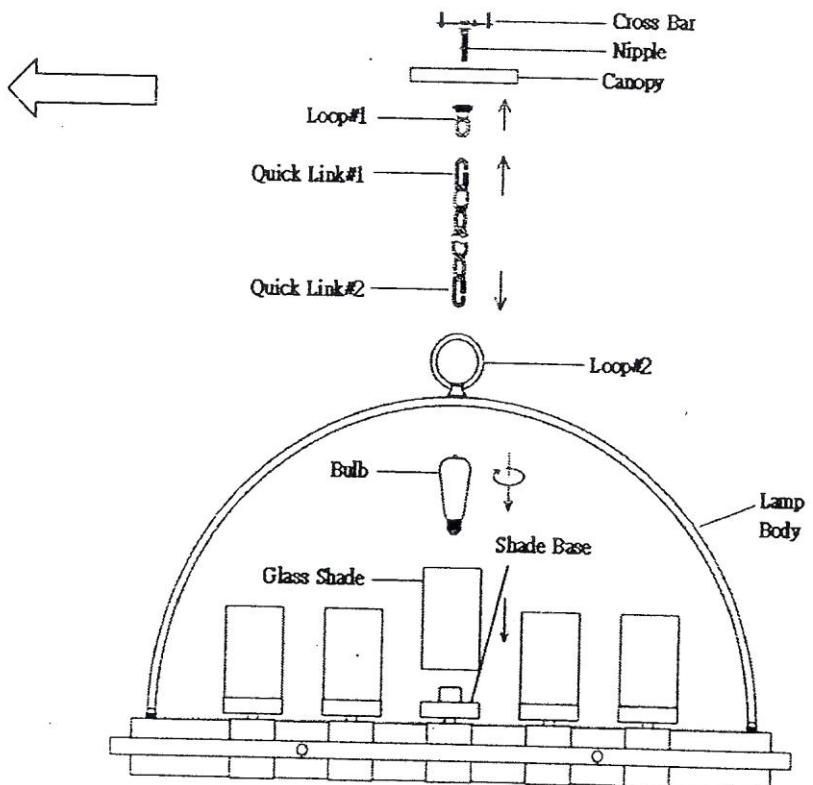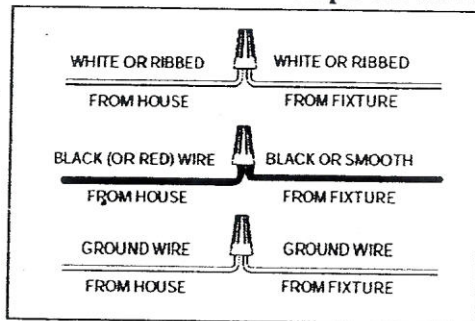


Hanging Fixture Installation and Wiring Instruction

Fixture Over 50 lbs

NOTE: ALWAYS TURN POWER OFF BEFORE INSTALLING LIGHTING FIXTURES!

Installation and Wiring

1. Disconnect power at main electrical panel before installation.
 2. Attach mounting strap to outlet box using box screws(not included)
 3. Screw threaded nipple into mounting strap approximately 1/2 inch.
Adjust height of canopy chain loop by temporarily holding canopy in place against ceiling with canopy chain loop extending downward through hole in canopy.
Approximately half of large exterior threads of canopy chain loop should be protruding below canopy. secure threaded nipple to mounting strap with hex nut.
 4. Use pliers to open chain link on the ceiling end of chain, and attach to canopy chain loop. Close chain links.
 5. Use pliers to open one end link of the chain and attach to loop on fixture. Close link. Be carefully not to damage the finish on the chain.
Thread fixture wire through chain links weaving wire through every second link.
 6. Pull ends of chain and wires through canopy chain loop & canopy.
 7. Use pliers to open the other end link of chain and attach to canopy chain loop. Close link. Be carefully not to damage finish in chain.
 8. Pass ends of fixture wires through center hole of canopy chain loop, thread nipple and mounting strap
 9. Connect the fixture wire that is white, tinned, or has a ribbed surface to the outlet box supply wire (WHITE). Connect the other half of the fixture wire that is black, unmarked, or has a smooth surface to the outlet box supply wire (BLACK), Use wirenuts (not provided) to connect all fixture wires.
 10. Connect the fixture ground wire and the outlet box supply ground wire with wirenut (not provided). See Grounding Detail in Figure C.
 11. Spread the electrical splices so that the black wires are on one side of the outlet box and the white wires are on the other side.
 12. Slide canopy up and into place against the ceiling. Slide collar ring up and thread onto collar loop against canopy.
- Note: Make sure the chain supports the weight of the light fixture and no weight is on the supply or ground wires.

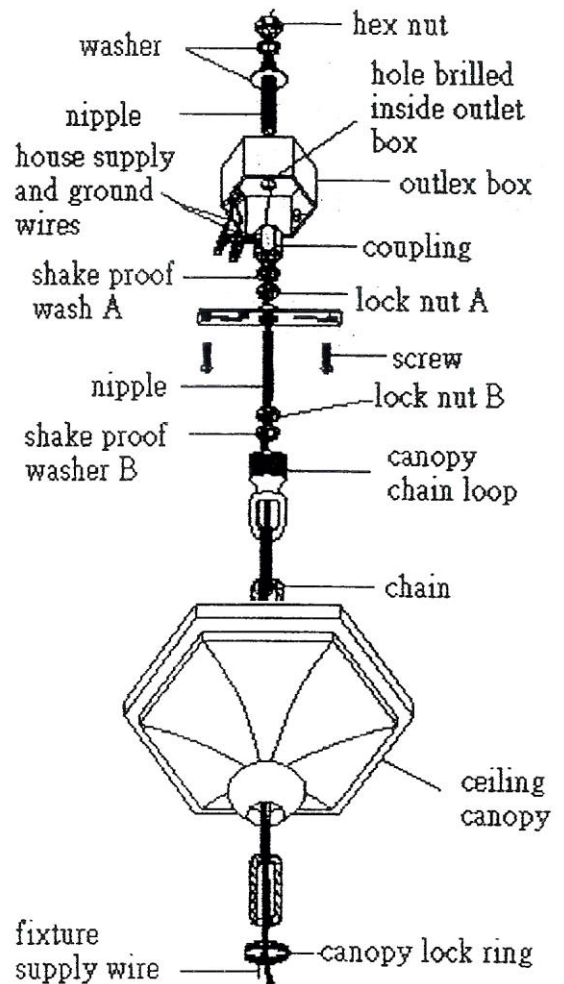

INSTALLATION INSTRUCTION FOR SAFETY CABLE INSTALLATION

IN INSTRUCTION:

THIS FIXTURE IS PROVIDED WITH A SAFETY CABLE. THE SAFETY CABLE PROVIDES A BACK UP SYSTEM OF THE FIXTURE'S FRAME AND THE INSTALLATION HARDWARE. IT IS ESSENTIAL THAT THE SAFETY CABLE BE PROPERLY INSTALLED. THE CABLE MUST BE SECURED TO A STRUCTURAL MEMBER OF THE BUILDING, AND NOT TO THE OUTLET BOX. THE CABLE MUST BE TERMINATED WITH CLAMP'S SPECIFICALLY SIZED FOR THE CABLE. IF THE U-CLAMPS ARE USED, THEY MUST BE ORIENTATED AS PER THE DRAWING BELOW. IF THE CABLE HAS A PLASTIC COVERING, IT MUST BE REMOVED FROM THE AREA WHERE THE CLAMPS ARE MOUNTED. MAKE SURE ALL HARDWARE IS PROPERLY TIGHTENED AND THAT THE CABLE IS POSITIONED CLEAR OF ANY OBSTRUCTIONS.

CORRECT APPLICATION

