


REVELATION
by UTTERMOST
ASSEMBLY INSTRUCTIONS
Illustration

ITEM NO.:R22603

CORD COVER
MOUNTING OPTION
(Fig.1)

When it's direct wire option, it can be mounted both horizontal & vertical;
When it's cord cover option, it can only be mounted vertical.

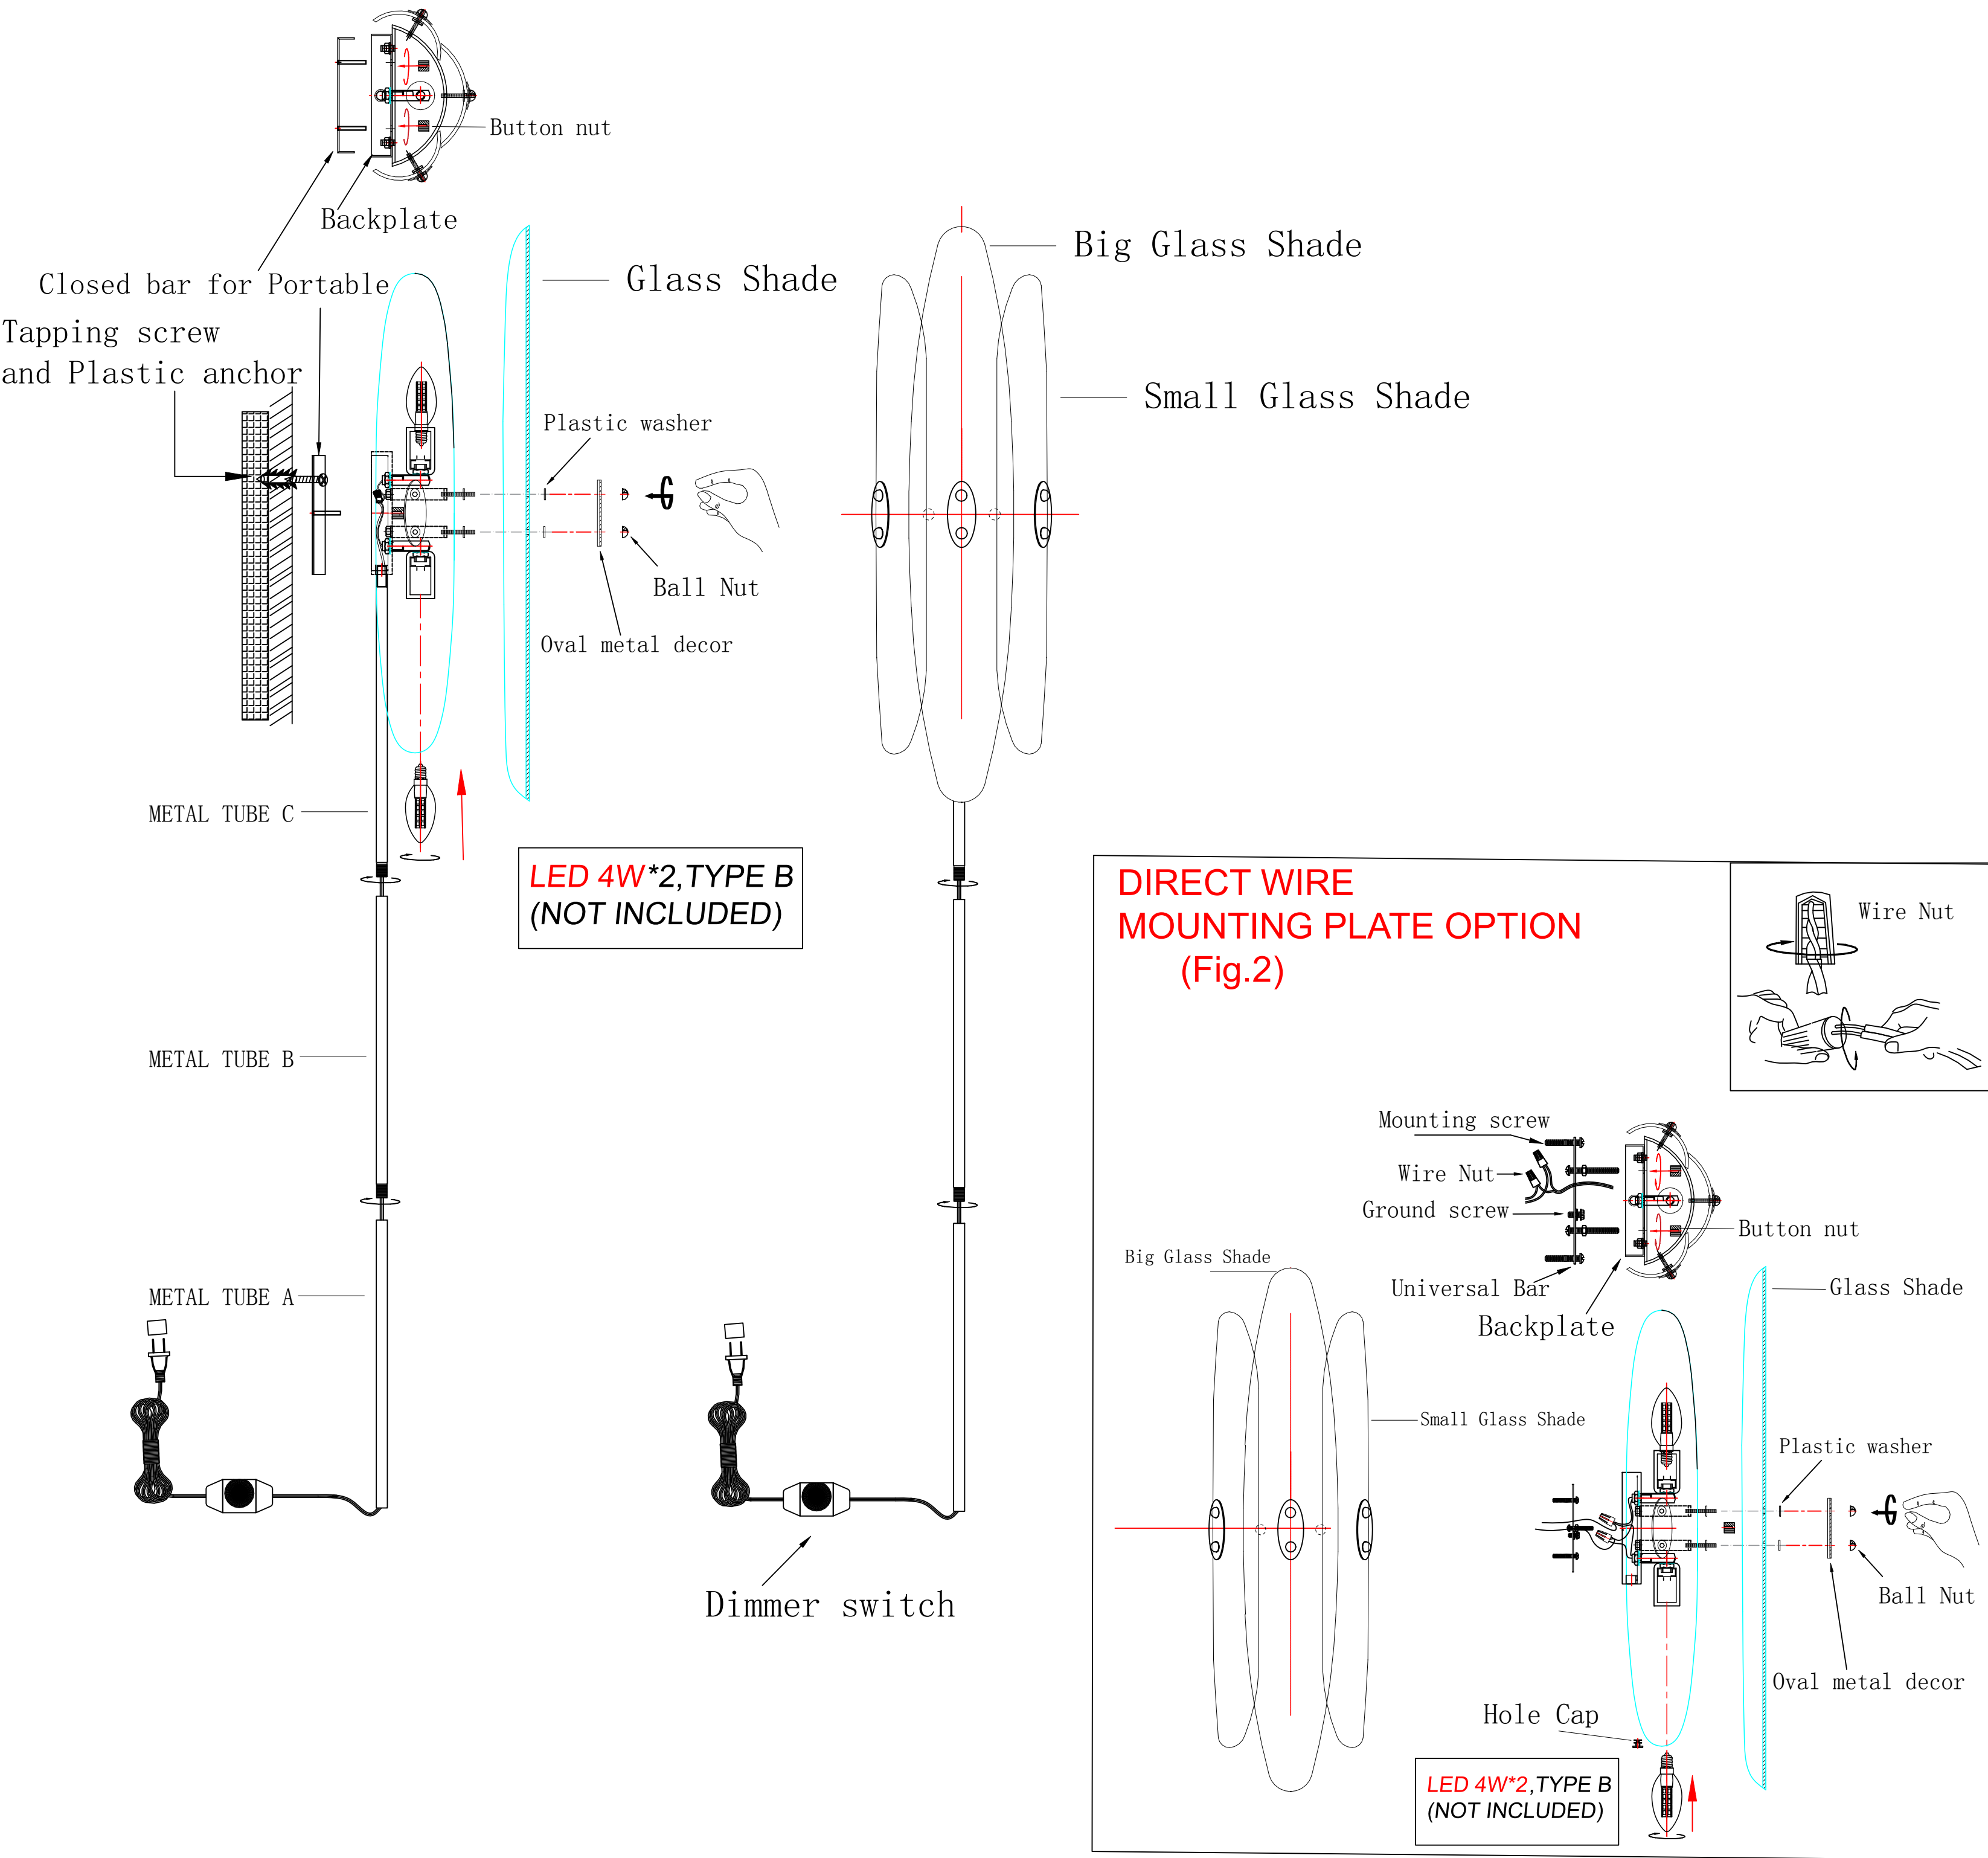

REVELATION
by UTTERMOST
ASSEMBLY INSTRUCTIONS

ITEM NO: R22603

Parts and Hardware List

A.	Button Nut	2PCS
B.	Closed Bar for Portable	1PC
C.	Tapping screw	2PCS
D.	Plastic Anchor	2PCS
E.	Hole cap	1PC
F.	Universal Bar	1PC
G.	Mounting Screw	2PCS
H.	Green Ground Screw	1PC
I.	Wire Nut	3PCS
J.	Plastic washer	12PCS

WARNING: **BEFORE INSTALLING AND USER MAINTENANCE**, make sure the electricity supply is shut off to avoid a possible electric shock. We suggest a licensed electrician for all installations.

Important Safety Instructions:

- This sconce can be converted from portables (plug in) into fixture (hardwired).
- These instructions are provided for your safety. It is very important that they are read carefully and completely before beginning the assembly and installation of this lighting fixture.
- This portable luminaire has a polarized plug (one blade is wider than the other) as a safety feature to reduce the risk of electric shock. This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use with an extension cord unless plug can be fully inserted. Do not alter the plug. Do not attempt to defeat this safety feature.
- The lighting fixture is meant for indoor use. It must be connected only to 3-wire, single-phase electrical supply systems (provided with Ground wire or equivalent protection system).
- We strongly recommend that a professional electrician install all direct wire fixtures.
- THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

CORD COVER ASSEMBLY. (See Fig.1)

1. Carefully remove the parts and hardware from the carton.
2. Attach the backplate to fix closed bar, then screw Knurl button Nuts until tight.
- 3.Screw the metal tube C to the lamp body; screw the metal tube B to the metal tube C; screw the metal tube A to the metal tube B.
4. The Plastic Anchors and Tapping screws fasten on the wall, then the wall sconce hang on the Tapping screws.
- 5.Install 2*LED 4 Watt, Type B bulb (NOT INCLUDED) into the fixture.
- 6.Place the small glass shade onto the lamp body with plastic washers, then secure the oval metal decor onto the shade with ball nuts. Lastly secure the big glass shade in the same way.

DIRECT WIRE AS SCONCE INSTALLATION (See Fig.2)

1. Carefully remove the parts and hardware from the carton.
2. Remove cord covers and plug wire. Fasten the Universal bar onto the Outlet Box using the mounting screw .
3. Install both ground wires in the Universal bar with the Green Ground Screw supplied.
4. Place the white wire, ribbed or tinted wire evenly against the white wire from the outlet box and place the black, smooth or un-tinted wire evenly against the black wire from the outlet box. (Connecting the Wires - See Figure 3)
5. Use cap to cover hole of backplate.
- 6.Attach the backplate to fix universal bar, and secure with the button nuts.
- 7.Install 2*LED 4 Watt, Type B bulb (NOT INCLUDED) into the fixture.
8. Place the small glass shade onto the lamp body with plastic washers, then secure the oval metal decor onto the shade with ball nuts. Lastly secure the big glass shade in the same way.