
UTTERMOST
ASSEMBLY INSTRUCTIONS

ITEM NO.: 21401

Parts and Hardware List

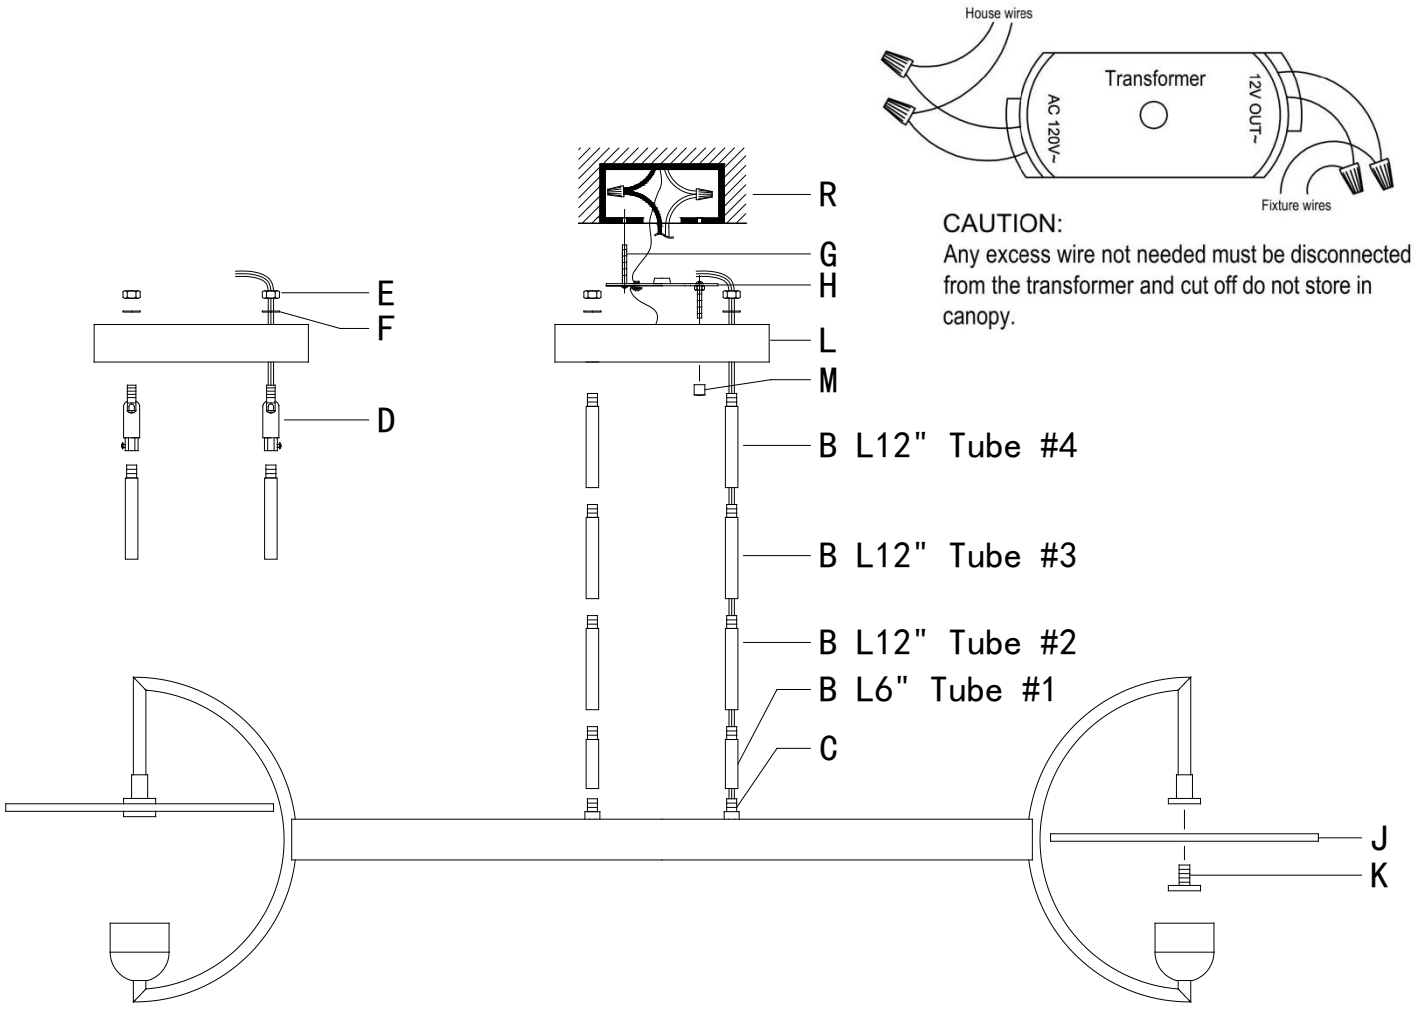

UTTERMOST
ASSEMBLY INSTRUCTIONS

ITEM NO.: 21401

Parts and Hardware List

We suggest a licensed electrician for all fixture installations.

B	**L12” Tube**	**3PCS**
B	**L6” Tube**	**1PC**
C	**Nipple**	**2PCS**
D	**Swivel**	**2PCS**
E	**Hex nut**	**2PCS**
F	**Washer**	**2PCS**

G	**Box Screws**	**2PCS**
H	**Mounting strap**	**1PC**
J	**Alabaster Disk shade**	**4PCS**
K	**Screw**	**4PCS**
L	**Canopy**	**1PC**
M	**Ball nuts**	**2PCS**

Please read the Wiring Instructions before you begin assembling and installing your fixture.

Please make sure that you have all the parts indicated before you begin assembling this item.

WARNING: BEFORE INSTALLING, make sure the electricity supply is shut off to avoid a possible electric shock. We suggest a licensed electrician for all lighting fixture installations.

1. Carefully removed the fixture from the carton and check that all parts are included as shown in figure. Becareful not to misplace any of the screws or parts, which are needed to install this fixture.
2. Adjust the length of the wire needed for your installation, remove excess, determine the number of Rods to be assembled to the Nipple (C) as needed for your hanging height, then the Tube #1 passes through the wire and screw the Tube #1 onto the Nipple (C) until tight.
3. Repeat Step 2 with the Tube #2, #3 and #4 as needed for your installation height.
4. Swivel (D) on the canopy (L) as needed, and the other end of the swivel to screw on one end of the Tube #4. If you don’t need Swivel (D), you can screw the Tube#4 on the Canopy(L) directly with the Washer(F), Hex nut (E) using a wrench.
5. Secure the Mounting strap (H) to the Outlet Box (R) with the two Outlet Box Screws (G).
6. Please connect LED driver wires, connect V+ to Red(+); connect V- to Black(-), then wrap the wires with wire nuts. Install the ground wire in Mounting strap(H) with the supplied Green Screw. Fix the driver inside the Canopy(L).
7. Refer to the wiring instructions on the next page for wiring. After wires are connected, tuck them carefully inside the Outlet Box(R).
8. Place the Canopy (L) over the Mounting strap (H) and secure with two Ball nuts (M).
9. Tighten the Alabaster Disk shade (J) with the Screw (K).

UTTERMOST
ASSEMBLY INSTRUCTIONS

ITEM NO.: 21401

NOTE: ALWAYS TURN POWER OFF BEFORE INSTALLING LIGHTING FIXTURES!

IMPORTANT: YOU SHOULD USE A QUALIFIED ELECTRICIAN TO INSTALL THIS FIXTURE.

Installation (see Fig.A)

1. Disconnect power at main electrical panel before installation.
2. Attach the **fixture screws** to the **mounting strap**, or **universal mounting plate** (whichever is provided). (Fig.A)
3. Pull the **supply wires** out from the **outlet box**, and mount the **mounting strap** or the **universal mounting plate** to the **outlet box**, using **box screws**.


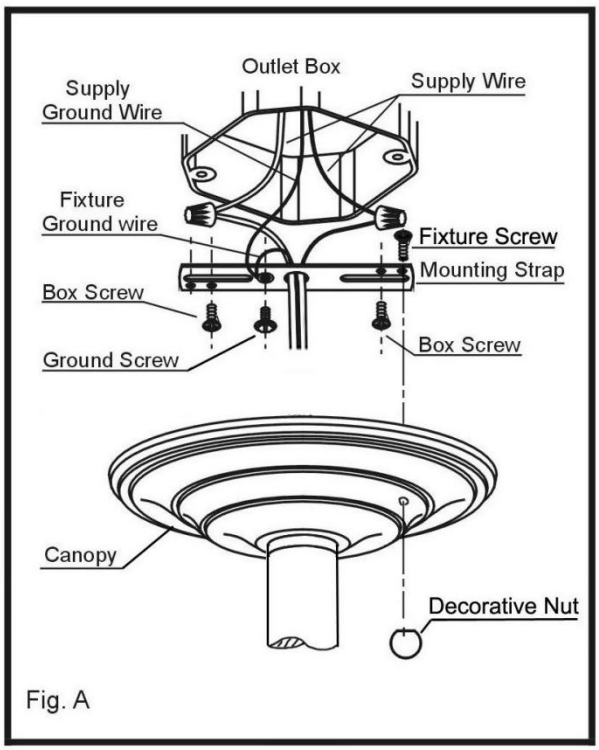


Fig. A

Wiring (see Fig.B)


4. Split the conductors of the **fixture wire** about 4 inches. Being carefull not to expose any of the wire inside of the insulation.
5. Connect the **fixture ground wire** and the **outlet box ground wire** to **mounting strap** with GREEN hex-head **ground screw** to tapped hole in **mounting strap** marked "GND".
6. Connect the half of the **fixture wire** that is white, marked, or has a ribbed surface to the **outlet box supply wire** (WHITE). Connect the other half of the **fixture wire** that is black, unmarked, or has a smooth surface to the **outlet box supply wire** (BLACK or RED). Use **wirenuts** provided.
7. Spread the electrical splices so that the black wire are on one side of the **outlet box** and the white wire are on the other side.
8. Place the **canopy** on the fixture over the **outlet box** and onto the **fixture screws**, and adjust the #8-32 **fixture screws** until they protrude out from the **canopy**. Remove the **canopy** and secure the position of the **fixture screws** by tightening the **hex nut** against the **mounting strap**. Place the **canopy** back onto the **fixture screws**, and secure into place using the **decorative nuts**.



Grounding Detail

Fig. B

Connect Black or Red House Wire to:	Connect White House Wire to:
Black	White
Parallel cord - SPT I & II (round & smooth)	Parallel cord - SPT I & II (square & ridged)
Clear, Brown, Gold or Black (without tracer)	Clear, Brown, Gold or Black (with tracer)
Insulated Wire (Other than GREEN) with copper conductor	Insulated Wire (Other than GREEN) with silver conductor

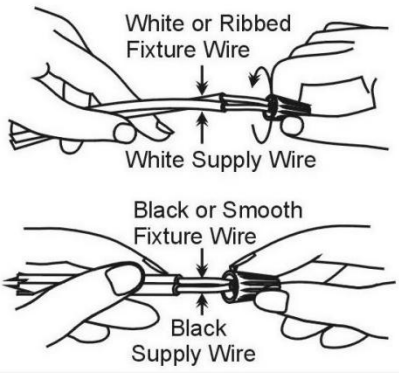

P.O. Box 558 | 3325 Grassy Hill Road | Rocky Mount, VA | 24151

www.uttermost.com