

UTTERMOST
ASSEMBLY INSTRUCTIONS

21424

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF THE POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.


We suggest a licensed professional electrician for installation

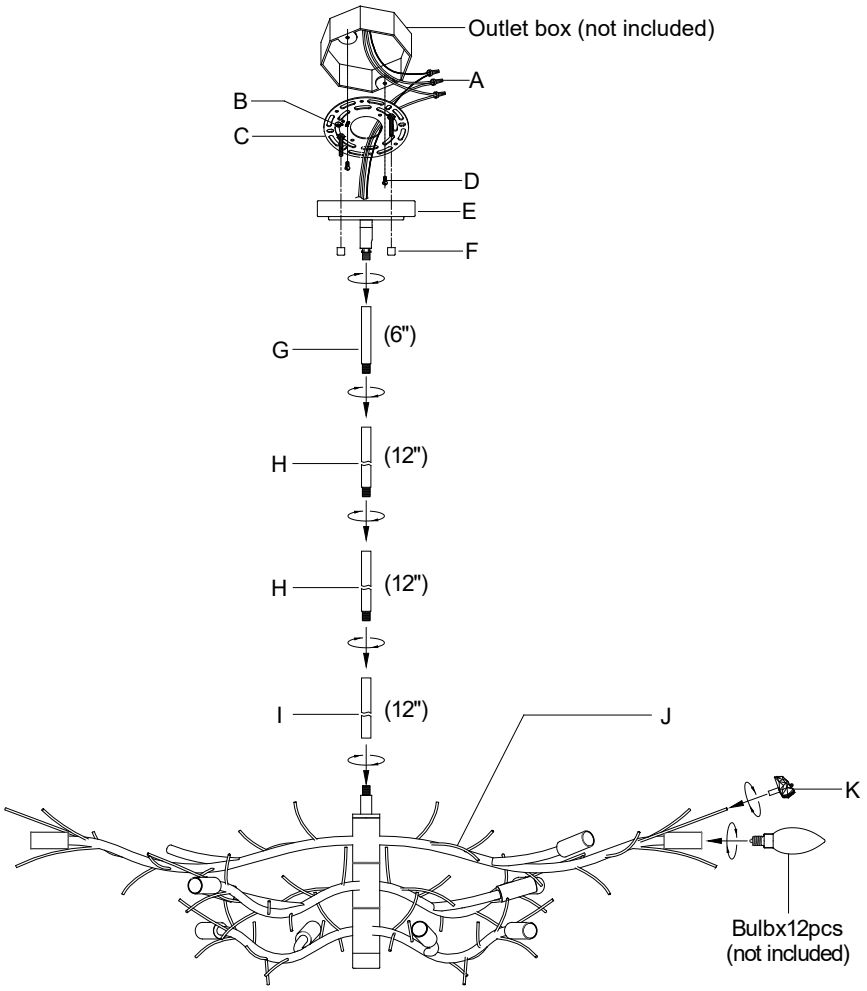




For angled ceilings,
Swivel opening towards wall.

Arm orientation

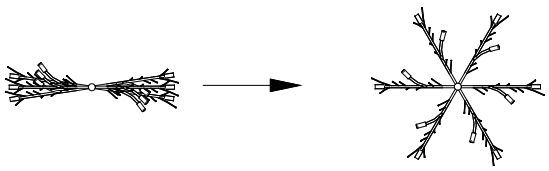

Wiring

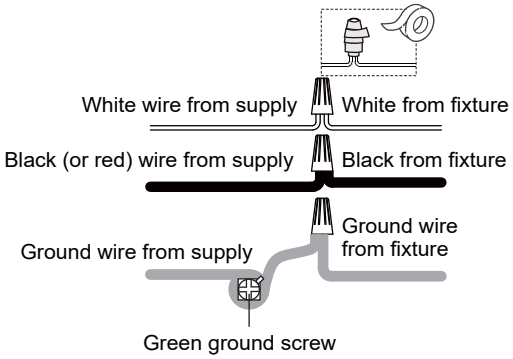

P.O. Box 558 | 3325 Grassy Hill Road | Rocky Mount, VA | 24151
www.uttermost.com

UTTERMOST

ASSEMBLY INSTRUCTIONS

21424

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF THE POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

We suggest a licensed professional electrician for installation

Parts and Hardware List

A	Wire Connector	3PCS
B	Green Ground Screw	1PC
C	Crossbar Assembly	1PC
D	Outlet Box Screw	2PCS
E	Canopy	1PC
F	Mounting Ball	2PCS

G	Rod-3	1PC
H	Rod-2	2PCS
I	Rod-1	1PC
J	Fixture Body	1PC
K	Crystal Accent	60PCS

Installation Steps

1. Turn power off at fuse or circuit box before starting installation process.
2. Carefully unpack your new fixture and lay out all parts on a clean flat surface.
3. Unscrew the two Mounting balls (F) from the Canopy (E). Remove the Crossbar assembly (C) from the Canopy (E) and keep the Crossbar assembly (C) and two Mounting balls (F) for later use.
4. Unfold the support arms of the Fixture body (J) to proper locations. (Refer to arm orientation)
5. Adjust the length of the wire for your installation, remove excess. Determine the number of Rods (G/H/I) to be assembled to the Fixture body (J) as needed for your hanging height. Then pass the fixture wires through the Rod-1 (I). Thread the Rod-1 (I) onto the uppermost nipple on the Fixture body (J).
6. Repeat Step 5 with the Rod-2 (H) and Rod-3 (G) as needed for your installation height. Screw swivel onto the Canopy (E) if needed. If you don't need swivel, you can screw the rod (G/H/I) to Canopy (E) directly.
7. Thread the Green ground screw (B) into the hole of the Crossbar assembly (C). Secure the Crossbar assembly (C) to the outlet box (Not Included) with the Outlet box screws (D).
8. Make wire connections with Wire connector (A):
   (Refer to wiring)
   Attach the fixture ground wire and the house ground wire to the Crossbar assembly (C) with the Green ground screw (B).
   -Connect the fixture ground wire to the house ground wire with a wire connector (A).
   -Connect the house white wire to the white fixture supply wire with a Wire connector (A).
   -Connect the house black (or red) wire to the black fixture supply wire with a Wire connector (A).
   -Wrap each connection with approved electrical tape and carefully insert all of the connected wires into the outlet box.
9. Attached the Canopy (E) of the Fixture body (J) to the Crossbar assembly (C). Secure with the Mounting balls (F).
10. Thread Crystal accent (K) into the nipple at the end of the fixture arm as shown.
11. Install the light bulbs (Not Included) in accordance with the fixture's specifications. **DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**