
UTTERMOST
ASSEMBLY INSTRUCTIONS


21426

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF THE POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.


We suggest a licensed professional electrician for installation

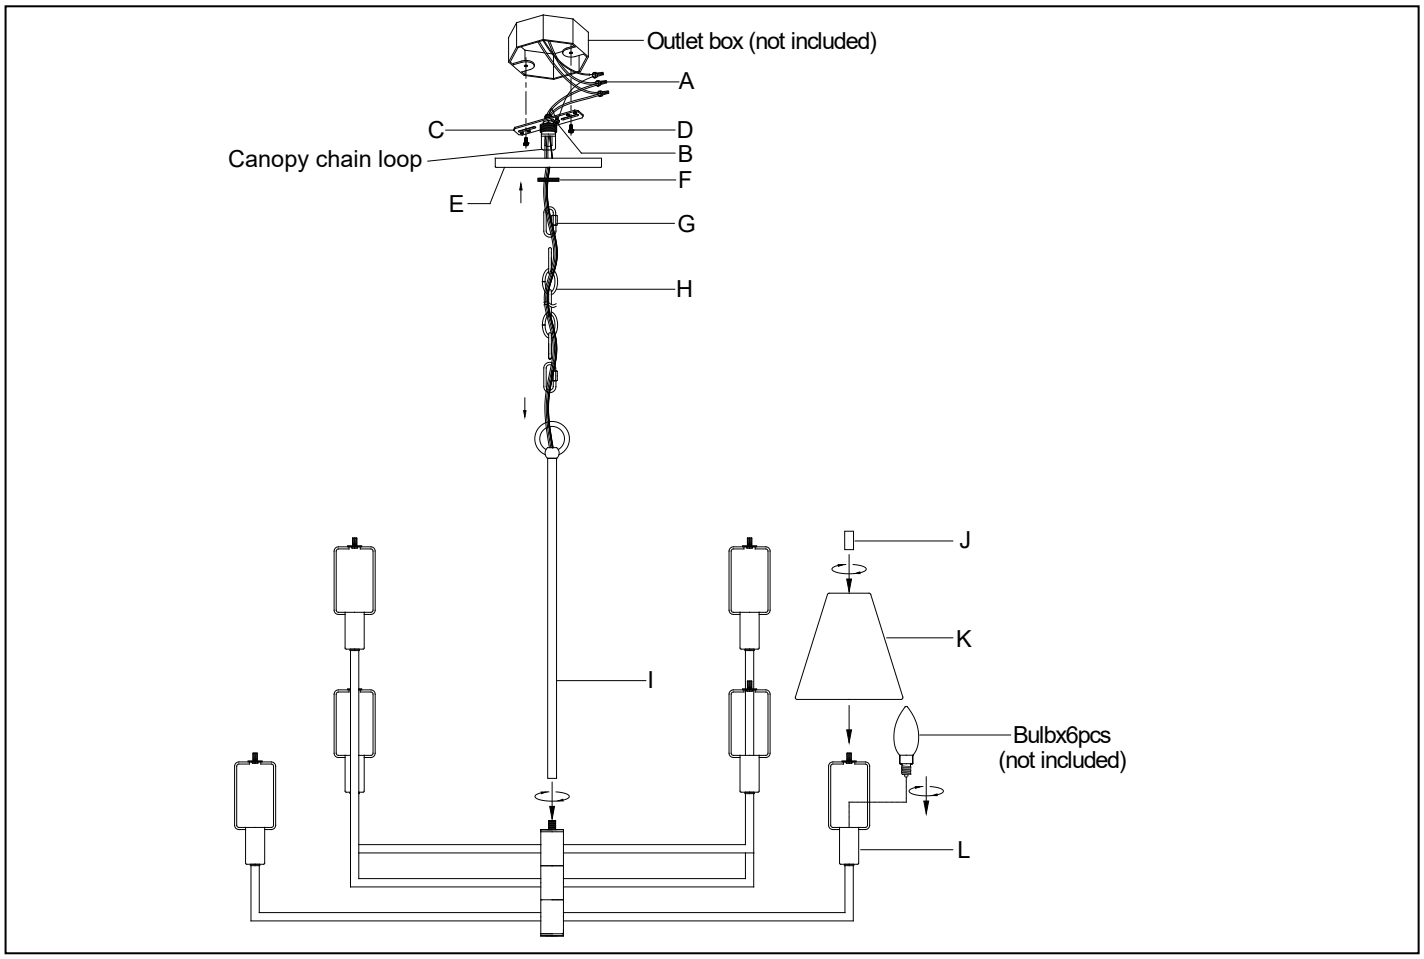

Arm orientation

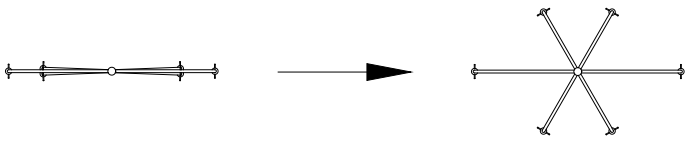

Wiring

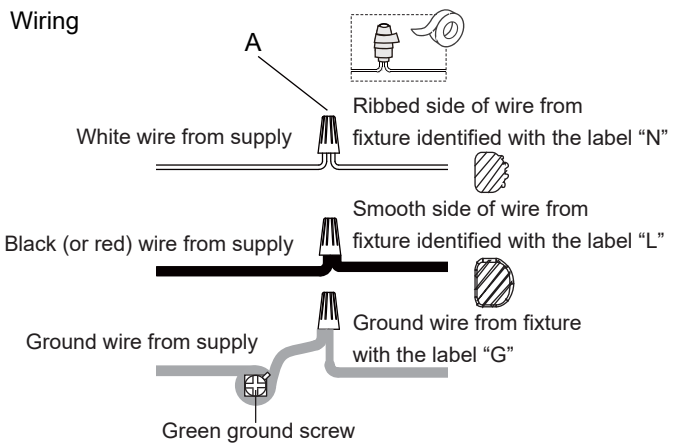

P.O. Box 558 | 3325 Grassy Hill Road | Rocky Mount, VA | 24151
www.uttermost.com

UTTERMOST

ASSEMBLY INSTRUCTIONS

21426

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF THE POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

We suggest a licensed professional electrician for installation

Parts and Hardware List

A	Wire Connector	3PCS	G	Quick Link	2PCS
B	Green Ground Screw	1PC	H	Chain	1PC
C	Crossbar Assembly	1PC	I	Rod	1PC
D	Outlet Box Screw	2PCS	J	Finial	6PCS
E	Canopy	1PC	K	Shade	6PCS
F	Canopy Lock Ring	1PC	L	Fixture Body	1PC

Installation Steps

1. Turn power off at fuse or circuit box before starting installation process.
2. Carefully unpack your new fixture and lay out all parts on a clean flat surface.
3. Unfold the support arms of the Fixture body (L) to proper locations. (Refer to arm orientation)
4. Thread the Rod (I) to the uppermost Fixture body (L). Hand-tighten until snug.
5. Choose desired hanging length for the light fixture.
   Adjust the Chain (H) & wire to the desired length remove extra links and extra wire as needed. Thread wire through chain (H).
   Connect one end of the Chain (H) to the Rod (I) with one Quick link (G).
   Place the Canopy lock ring (F) and the Canopy (E) over the Chain (H).
   Connect the other end of the Chain (H) to the Canopy chain loop with the remaining Quick link (G).
6. Thread the Green ground screw (B) into the hole of the Crossbar assembly (C). Secure the Crossbar assembly (C) to the outlet box (Not Included) with the Outlet box screws (D).
7. Make wire connections with Wire connector (A):
   (Refer to wiring)
   Attach the fixture ground wire and the house ground wire to the Crossbar assembly (C) with the Green ground screw (B).
   -Connect the fixture ground wire to the house ground wire with the wire connector (A).
   -Connect the house white wire to the fixture supply wire (ribbed sided) from the fixture identified with the label “N”.
   -Connect the house black (or red) wire to the fixture supply wire (smooth side) from the fixture identified with the label “L”.
   -Wrap each connection with approved electrical tape and carefully insert all of the connected wires into the outlet box.
8. Attach the Canopy (E) over the Canopy chain loop. Secure with Canopy lock ring (F).
9. Install the light bulbs (Not Included) in accordance with the fixture’s specifications. **DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**
10. Place the Shade (K) over the bracket on the Fixture body (L) and secure with the Finial (J).