
UTTERMOST
ASSEMBLY INSTRUCTIONS


21685

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF THE POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

We suggest a licensed professional electrician for installation

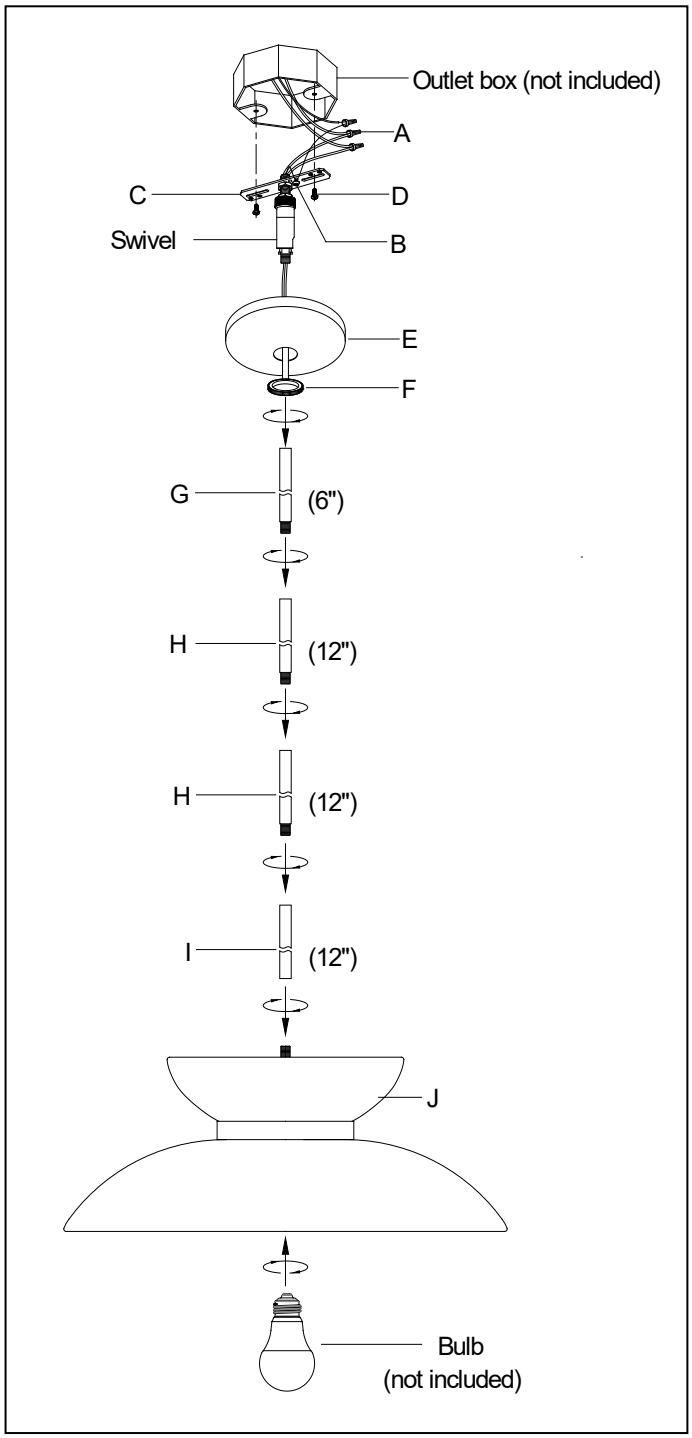

Wiring

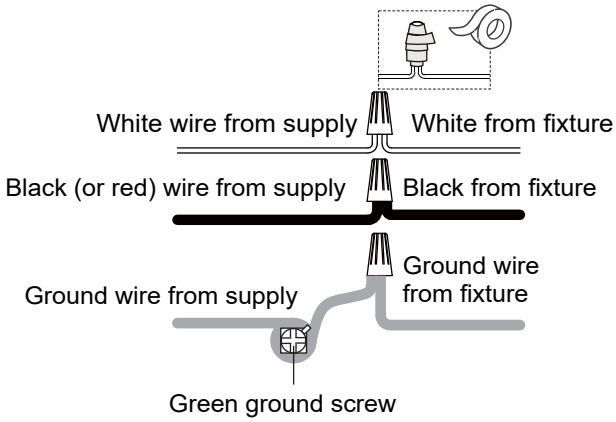

P.O. Box 558 | 3325 Grassy Hill Road | Rocky Mount, VA | 24151
www.uttermost.com

UTTERMOST

ASSEMBLY INSTRUCTIONS

21685

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF THE POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

We suggest a licensed professional electrician for installation

Parts and Hardware List

A	Wire Connector	3PCS
B	Green Ground Screw	1PC
C	Crossbar Assembly	1PC
D	Outlet Box Screw	2PCS
E	Canopy	1PC
F	Canopy Lock Ring	1PC

G	Rod-3	1PC
H	Rod-2	2PCS
I	Rod-1	1PC
J	Fixture Body	1PC

Installation Steps

1. Turn power off at fuse or circuit box before starting installation process.
2. Carefully unpack your new fixture and lay out all parts on a clean flat surface.
3. Adjust the length of the wire for your installation, remove excess. Choose the suitable number of rods (G/H/I) and install the Rod-1 (I), Rod-2 (H), Rod-3 (G) to the uppermost nipple on the Fixture body (J). Place the Canopy lock ring (F) and the Canopy (E) over the Rod (G/H/I). IF NEEDED THREAD THE SWIVEL TO THE UPPERMOST ROD. Hand-tighten until snug.
4. Thread the Green ground screw (B) into the hole of the Crossbar assembly (C). Secure the Crossbar assembly (C) to the outlet box (Not Included) with the Outlet box screws (D).
5. Make wire connections with Wire connector (A):
   (Refer to wiring)
   Attach the fixture ground wire and the house ground wire to the Crossbar assembly (C) with the Green ground screw (B).
   -Connect the fixture ground wire to the house ground wire with a wire connector (A).
   -Connect the house white wire to the white fixture supply wire with a Wire connector (A).
   -Connect the house black (or red) wire to the black fixture supply wire with a Wire connector (A).
   -Wrap each connection with approved electrical tape and carefully insert all of the connected wires into the outlet box.
6. Attach the Canopy (E) over the Swivel. Secure with Canopy lock ring (F).
7. Install the light bulb (Not Included) in accordance with the fixture's specifications. **DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**