





UTTERMOST

ASSEMBLY INSTRUCTIONS

STYLE# 22131

Carefully unpack all lamp parts from the carton.

1. Take the lamp carefully out of the Carton, and place it on a flat surface.
2. Be sure the power to the installation point is power off.
3. Place the **Universal Bar** over the **Canopy** and thread **Mounting Ball** onto the Mounting Screw to secure it. Hand tighten until snug.
4. Thread **Part A** which with a round disk onto **Nipple #1**.
5. Determine the number of **Rods** to be assembled to the Fixture Body according to your hanging height. Pass supply wires through **Part A** and **Part B** then the **Rods**. Thread the **Rods** to connect **Nipple #3** and **Nipple #2**. Then thread **Nipple #2** onto **Part B**. Hand tighten until snug.
6. Pass the supply wires through the **Canopy** and the hole in the middle of the **Universal Bar**.
7. The power supply wire consists of three wires, one black wire, one white wire and one silver ground wire.
8. Connect the wires as shown :
 - A. Connect the House Ground Wire to the Fixture Ground Wire.
 - B. Connect the House White or Ribbed Wire to the Fixture Supply Wire (White or Ribbed Side).
 - C. Connect the House Black/Red Wire to the Fixtrue Supply Wire (Black or Smooth Side).
 - D. Wrap each connected wire with Wire Connector and carefully stuff all of the connected wires into the Outlet Box.
9. Install correct **Bulb** to the **Socket** referring to fixture markings and/or labels for maximum wattage. (Bulb not Included)

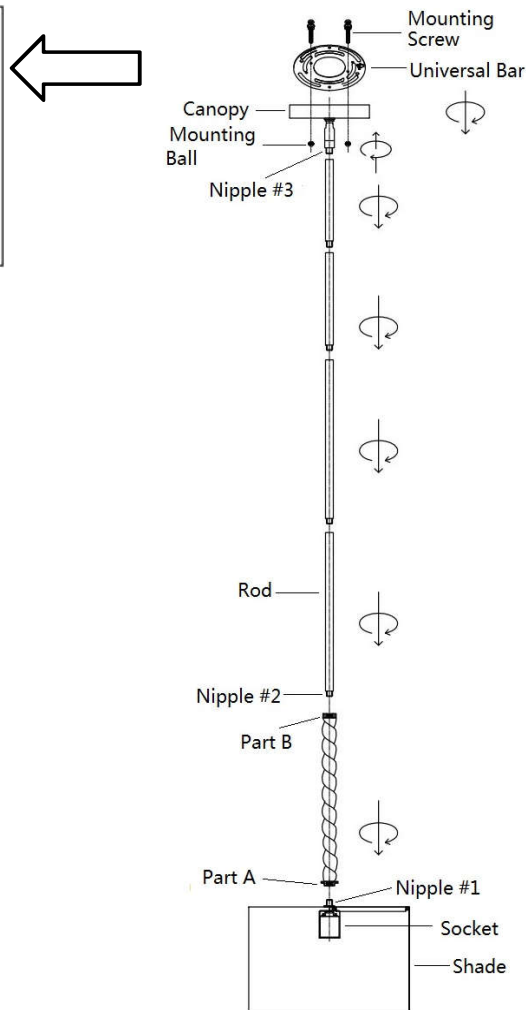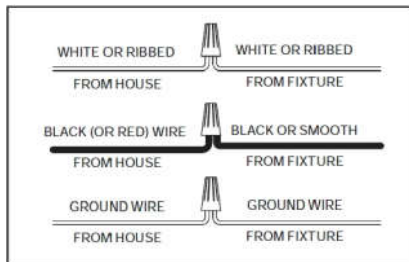

22131

PO BOX 558/3325 GRASSY HILL RD. ROCKY MOUNT, VIRGINIA 24151

www.uttermost.com