



UTTERMOST

## ASSEMBLY INSTRUCTIONS

**STYLE#: 22167**

**Carefully unpack all lamp parts from the carton.**

1. Take the lamp carefully out of the Carton, and place it on a flat surface.
2. Be sure the power to the installation point is power off.
3. Using 2pcs of Outlet Box Screws, fasten the **Universal Bar** to the Outlet Box. Then Secure the Canopy to the **Universal Bar** with the **Mounting Balls**, making sure that the **balls** are fully threaded onto the **Mounting Screws** before tightening.

4. The power supply wire consists of three wires, one black wire, one white wire and one silver ground wire.



Connect the wires as shown. **A.** Connect the House Ground Wire to the Fixture Ground Wire.

**B.** Connect the House White (or Ribbed) Wire to the Fixture Supply Wire (White or Ribbed Side).

**C.** Connect the House Black (or Red) Wire to the Fixture Supply Wire (Black or Smooth Side).

**D.** Wrap each connected wire with Wire Connector and carefully stuff all of the connected wires into the Outlet Box.

4. Refer to label on socket and install proper wattage bulb. (Not Included).

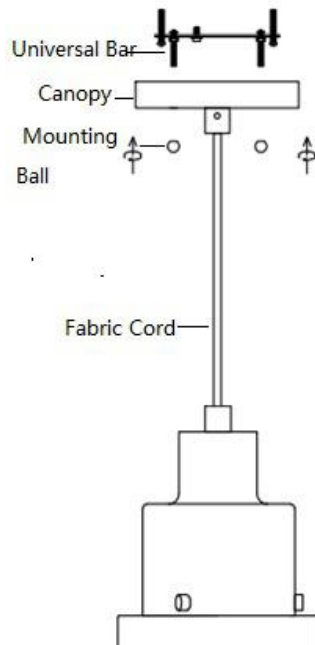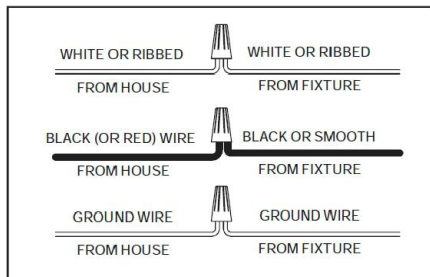

PO BOX 558/3325 GRASSY HILL RD. ROCKY MOUNT, VIRGINIA 24151  
[www.uttermost.com](http://www.uttermost.com)





































