


STYLE NO.: 22197

Assembly Instruction

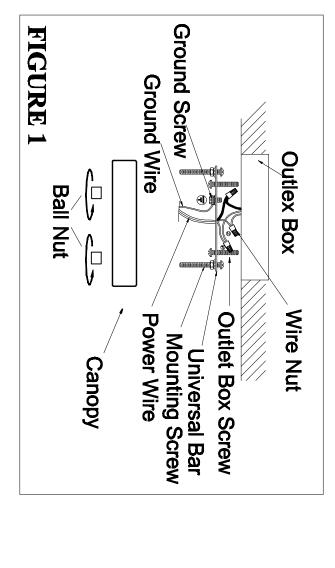



Metal Tu

ube C

Metal Tube D

Ceiling Assembly

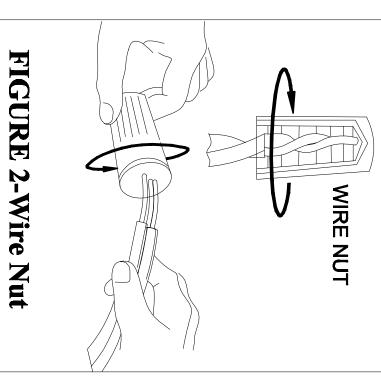

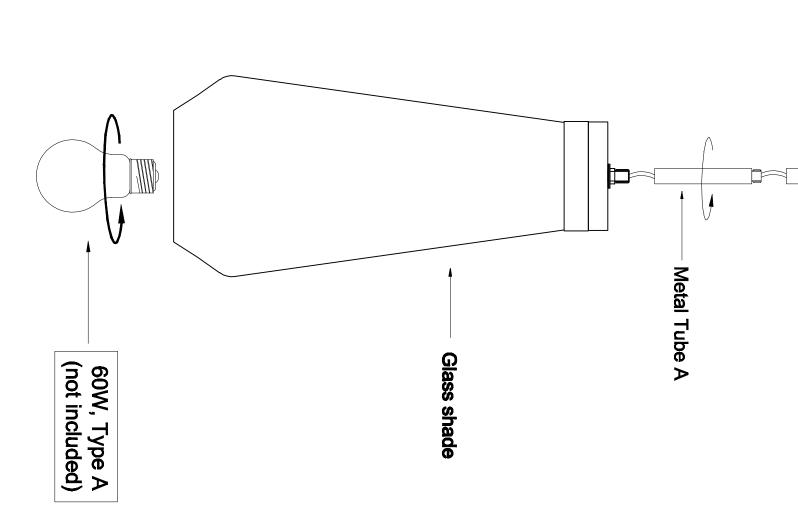

PO BOX 558/3325 GRASSY HILL RD. www.uttermost.com **ROCKY MOUNT, VIRGINIA 24151**

MANUFACTURERS OF WALL DECOR, LIGHTING,



DECORATIVE ACCESSORIES AND ACCENT FURNITURE

STYLE NO.: 22197 Parts and Ha rdware List

エ	<u>.</u>	т.	ш	D.	ဂ	ï	Þ	
Outlet Box Screw	Wire Nut	Ground Screw (green)	Mounting Screw	Universal Bar	Shade Assembly	Ball Nut	Ceiling Assembly	
2PCS	3PCS	1PC	2PCS	1PC	1PC	2PCS	1PC	

Please read Wiring Instructions Please make sure that you have all the parts before you begin assembling and installing your Ceiling lamp. indicated before you begin assembling this item.

possible electric shock. WARNING: BEFORE INSTALLING, make sure the electricity supply is shut off to avoid a

Assembly Instruction

Metal Tube B

installations. Carefully unpack all lamp parts from carton. We suggest a licensed electrician for all fixture

- parts will not be damaged. 1. Take the parts carefully out of the carton, place them on a flat surface, and make sure that the
- Bar. Attach the Universal Bar to the Outlet Box 2.Remove the Ball Nuts under the Canopy from the Mounting Screws, and take out the Universal by using two Outlet Box Screws. (See Figure 1)
- number of rods to be assembled to the Fixture Body as needed for your hanging height. 3.Adjust the length of the wire needed for your installation, remove excess. Determine the
- 4. Place the null wire, ribbed wire evenly against the ribbed wire from the Outlet Box and place the live wire, smooth Install the ground wire in the Universal Bar with the suppplied Ground Screw (green). wire evenly against the smooth wire from the Outlet Box. (Connecting the
- 5. After the wires are connected, tuck them carefully inside the Outlet Box. Attach the Ceiling Assembly to the Mounting Screws and secure with two Ball Nuts. (See Figure 1) Wires -See Figure 2)
- 6. Screw the top of glass shade Assembly onto the Metal Tube (A) until secure.
- 7. Repeat the Step 6 with the Metal Tube (B), (C) and (D).
- 8.Screw the metal tube (D) to the canopy.

 9. Install 1*60 Watt, Type A bulbs (sold separately) into the sockets of the fixture.

Your installation is complete. Turn electrical power back ON.

PO BOX 558/3325 GRASSY HILL RD. ROCKY MOUNT, VIRGINIA 24151 www.uttermost.com