



UTTERMOST




## ASSEMBLY INSTRUCTIONS

ITEM # : **22512**

**IMPORTANT TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION.**

*Carefully unpack and identify all parts before assembly.*

1. Be sure the power to the installation point is off.
2. Pull the power supply wires out from the **Backplate**, and secure the **Universal Bar** to the **Backplate** with the **Mounting Ball**.
3. The power supply wire consists of three wires, one black wire, one white wire and one silver ground wire.
4. Connect the wires as shown :
  - A. Connect the House Ground Wire to the Fixture Ground Wire.
  - B. Connect the House White or Ribbed Wire to the Fixture Supply Wire (White or Ribbed Side).
  - C. Connect the House Black/Red Wire to the Fixture Supply Wire (Black or Smooth Side).
  - D. Wrap each connected wire with Wire Connector and carefully stuff all of the connected wires in the Outlet Box.
5. Place the **Arm** to the **Nipple**. Hand tighten until snug.
6. Place the **Glass Shade** carefully onto the **Socket**. Then thread the **metal sleeve** onto the **Socket**. Lock the **Socket Collar** with the **Plastic Wrench** to secure the **Glass Shade** and the **Metal Sleeve**. Hand tighten until snug.
7. Install the **bulb** referring to fixture markings and/or labels for maximum wattage on the **Socket**. (Included)

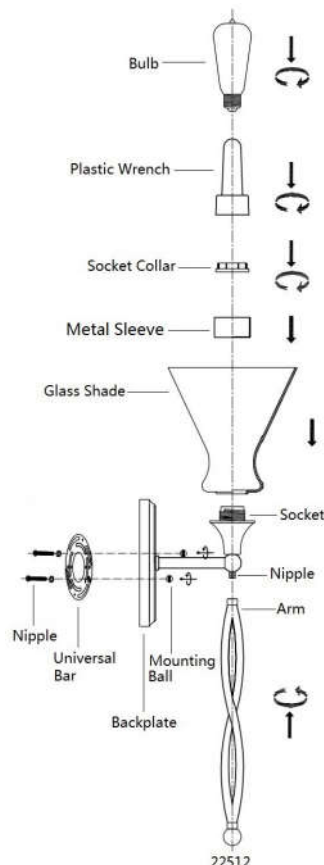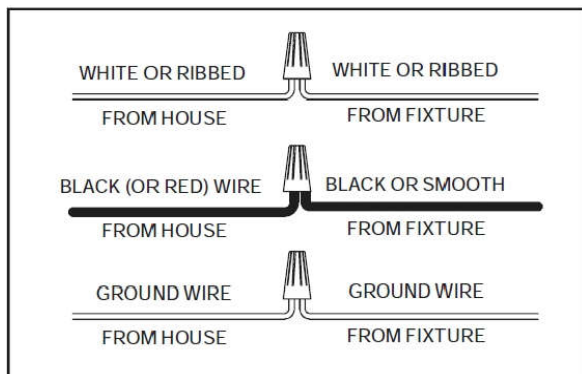

22512

PO BOX 558/3325 GRASSY HILL RD. ROCKY MOUNT, VIRGINIA 24151

[www.uttermost.com](http://www.uttermost.com)