

# UTTERMOST

## ASSEMBLY INSTRUCTIONS


22607

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

*We suggest a licensed electrician for all fixture installations*

### Installation Steps

1. Thread the Ground screw into the hole of the back plate. Secure the back plate to the outlet box with the Outlet box screws.
2. Put the plastic circle, glass shade, plastic circle onto the socket in order, then secure with socket ring using the wrench.
3. Install the light bulb in accordance with the fixture's specifications. **DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**
4. Make Wire connections with Wire Connector:
  - The smooth wire (w/ marking) from fixture to Black Wire from power source.
  - The ribbed wire (w/o marking) from Fixture to White Wire from power source.
  - Attach the Ground Wire and house ground wire to the Mounting bar with the green Ground screw. Carefully tuck wires back into the Outlet Box.
5. Place the fixture plate over the back plate and align the mounting holes on the side of the back plate and fixture plate, then secure with screws tightly.
6. Rotate the glass shade to its proper position as the above side view shown in the illustration.
7. Turn on the power at fuse or Circuit Box.

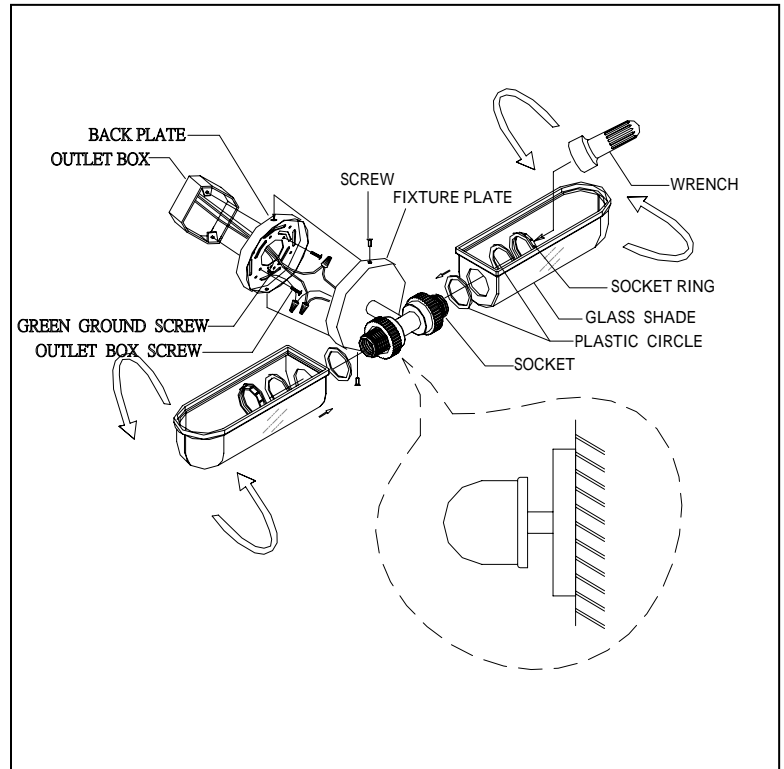

**CAUTION:** If need to replace bulbs after fixture installation, Please firstly rotate the glass shade to proper position per the arrow direction in the above illustration, Then replace the bulbs .