
UTTERMOST
ASSEMBLY INSTRUCTIONS

ITEM NO.: 22628/22629

Parts and Hardware List

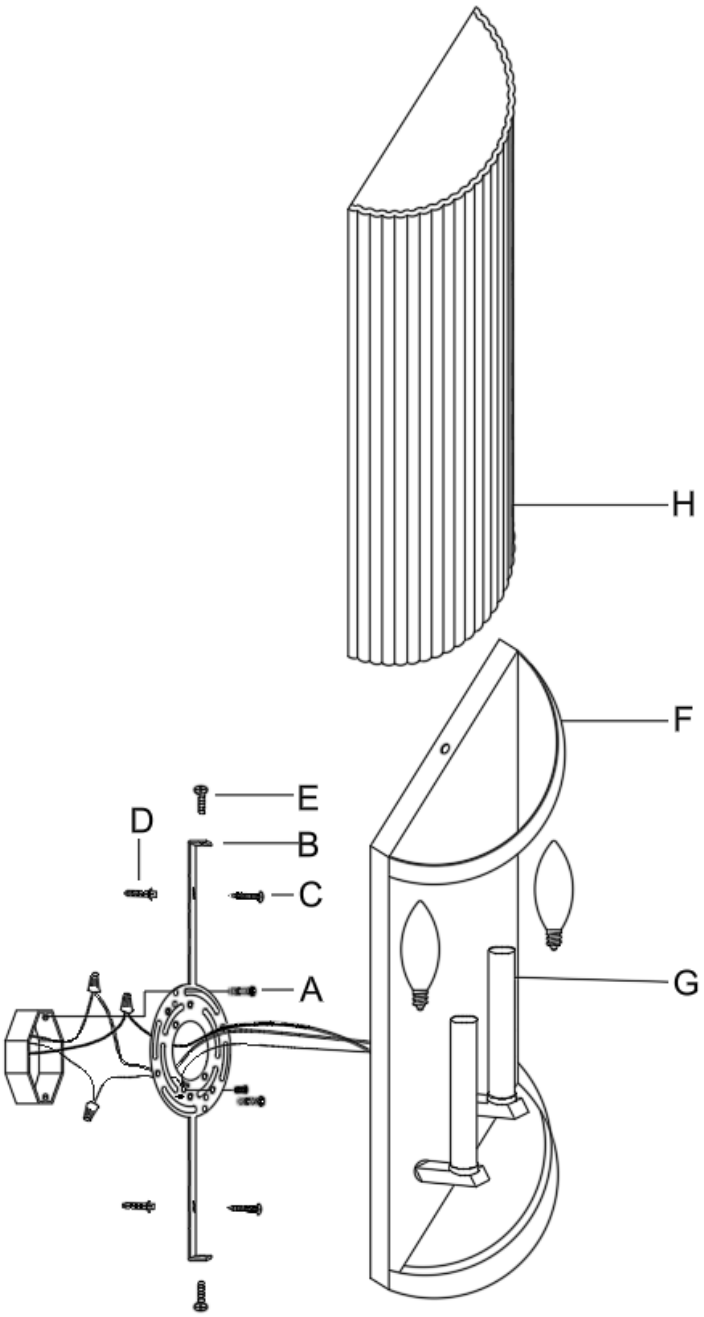

P.O. Box 558 | 3325 Grassy Hill Road | Rocky Mount, VA | 24151
www.uttermost.com

UTTERMOST
ASSEMBLY INSTRUCTIONS

ITEM NO.: 22628/22629

Parts and Hardware List

We suggest a licensed electrician for all fixture installations.

A	Outlet Box Screw	2PCS
B	Mounting Strap	1PC
C	Self-Tapping Screw	2PCS
D	Anchor	2PCS

E	Screw	2PCS
F	Lamp Body	1PC
G	socket	2PCS
H	Glass	1PC

Please read the Wiring Instructions before you begin assembling and installing your fixture.

Please make sure that you have all the parts indicated before you begin assembling this item.

WARNING: BEFORE INSTALLING, make sure the electricity supply is shut off to avoid a possible electric shock. We suggest a licensed electrician for all lighting fixture installations.

1. Carefully removed the fixture from the carton and check that all parts are included as shown in figure. Be careful not to misplace any of the screws or parts, which are needed to install this fixture.
2. Install the Mounting strap (B) to the wall with 2pcs of Out let box screw(A) & Self-tapping screw(C) & Anchor(D) and connecting the wires refer to the next page.
3. Place the Lamp Body (F) over Mounting strap (B) so that the holes in the side of Mounting strap (B) line up with the holes in the Lamp Body (F). Use a screwdriver to thread screws (E) into the Lamp Body (F) until it is snug against the wall.
4. Install bulbs. (not included) (Please do not exceed the maximum capacity recommended on the socket.)
5. Carefully place the Glass shade (H) into the Lamp Body (F).

UTTERMOST

ASSEMBLY INSTRUCTIONS

FOR WALL MOUNT FIXTURE

ITEM NO.: 22628/22629

NOTE: ALWAYS TURN POWER OFF BEFORE INSTALLING LIGHTING FIXTURES!
IMPORTANT: YOU SHOULD USE A QUALIFIED ELECTRICIAN TO INSTALL THIS FIXTURE.

Installation (see Fig.A)

1. Disconnect power at main electrical panel before installation.
2. Guide **fixture wires** through hole in center of **mounting plate**.
3. Follow wiring instructions carefully (listed below).
4. Attach **mounting plate** to **outlet box** using **box screws** provided with **outlet box**.
5. Mount fixture by aligning mounting holes in **canopy** with **mounting screws**. Tighten to firmly hold **canopy** in place against wall .

Wiring (see Fig.B)

1. Split the conductors of the **fixture wire** about 4 inches. Being carefull not to expose any of the wire inside of the insulation.
2. Connect the **fixture ground wire** to the **outlet box ground wire** using **wirenut** (not provided). Connect **outlet box ground wire** to **mounting plate** with GREEN hex-head **ground screw** to tapped hole in **mounting plate** marked "GND".
3. Connect the half of the **fixture wire** that is white, marked, or has a ribbed surface to the **outlet box supply wire** (WHITE). Connect the other half of the **fixture wire** that is black, unmarked, or has a smooth surface to the **outlet box supply wire** (BLACK or RED). Use **wirenuts** provided.
4. Spread the electrical splices so that the black wire are on one side of the **outlet box** and the white wire are on the other side.


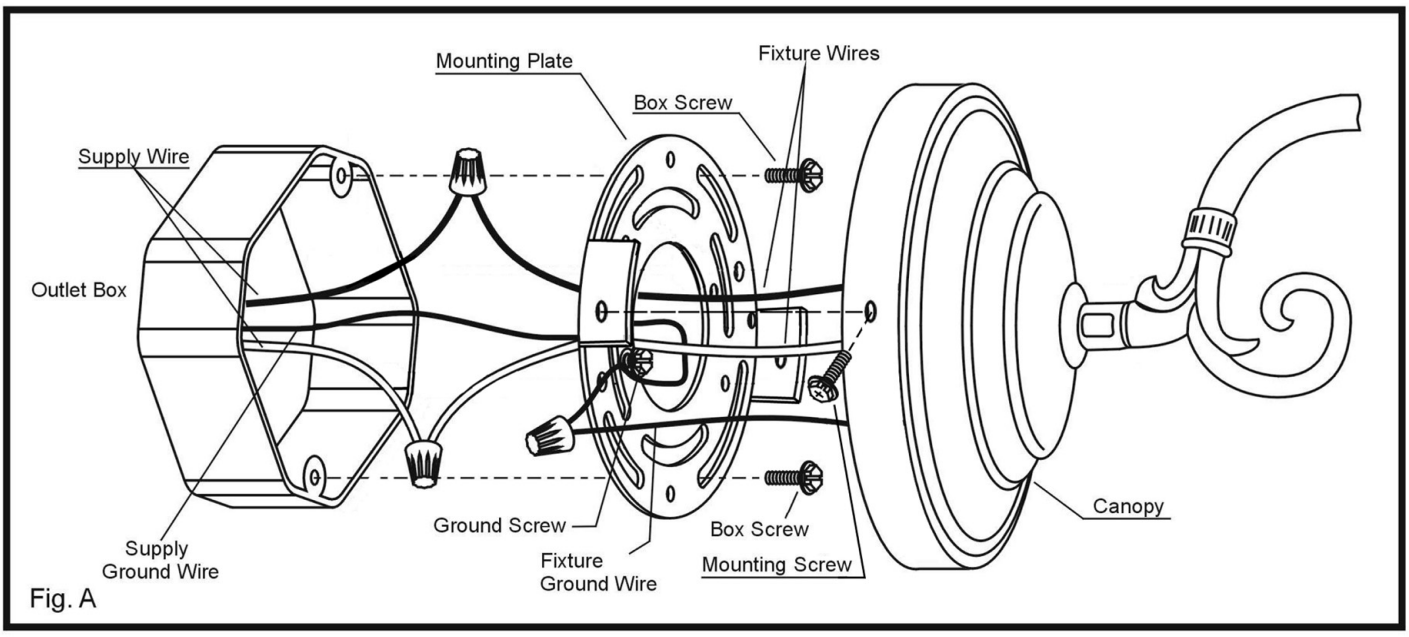


Fig. A



Grounding Detail

Connect Black or Red House Wire to:	Connect White House Wire to:
Black	White
Parallel cord - SPT I & II (round & smooth)	Parallel cord - SPT I & II (square & ridged)
Clear, Brown, Gold or Black (without tracer)	Clear, Brown, Gold or Black (with tracer)
Insulated Wire (Other than GREEN) with copper conductor	Insulated Wire (Other than GREEN) with silver conductor

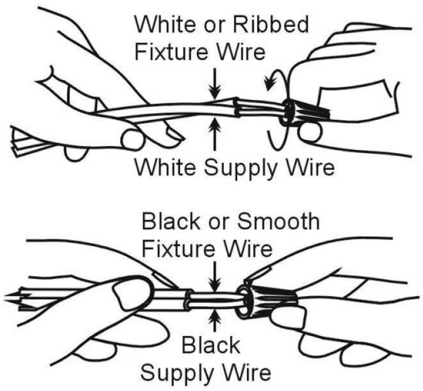


Fig. B

P.O. Box 558 | 3325 Grassy Hill Road | Rocky Mount, VA | 24151
www.uttermost.com