

UTTERMOST


ASSEMBLY INSTRUCTIONS

ITEM #: 22866

IMPORTANT TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION.

Carefully unpack and identify all parts before assembly.

1. Be sure the power to the installation point is off.
2. Pull the power supply wires out from the **Backplate**, and secure the **Universal Bar** to the **Backplate** with the **Mounting Ball**.
3. The power supply wire consists of three wires, one black wire, one white wire and one silver ground wire.
4. Connect the wires as shown : A. Connect the House Ground Wire to the Fixture Ground Wire.
B. Connect the House White or Ribbed Wire to the Fixture Supply Wire (White or Ribbed Side).
C. Connect the House Black/Red Wire to the Fixture Supply Wire (Black or Smooth Side).
D. Wrap each connected wire with Wire Connector and carefully stuff all of the connected wires into the Outlet Box.
5. Install the three **Bulbs** separately referring to fixture markings and/or labels for maximum wattage on the **Socket**. (Included)
6. Place one **Glass Shade** carefully onto the **Socket**.
7. Lock the **Socket Collar** with the **Plastic Wrench** to secure the **Glass Shade**. Hand tighten until snug. Then lock the other two **Glass Shade** the same way.

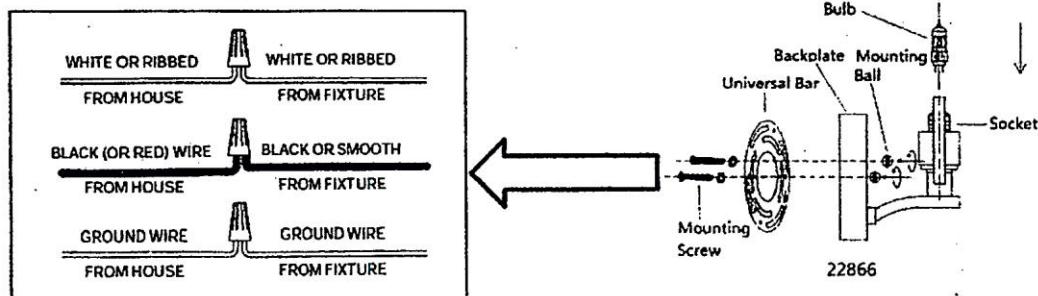

PO BOX 558/3325 GRASSY HILL RD. ROCKY MOUNT, VIRGINIA 24151

www.uttermost.com