




UTTERMOST

ASSEMBLY AND INSTALLATION INSTRUCTIONS

22454

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

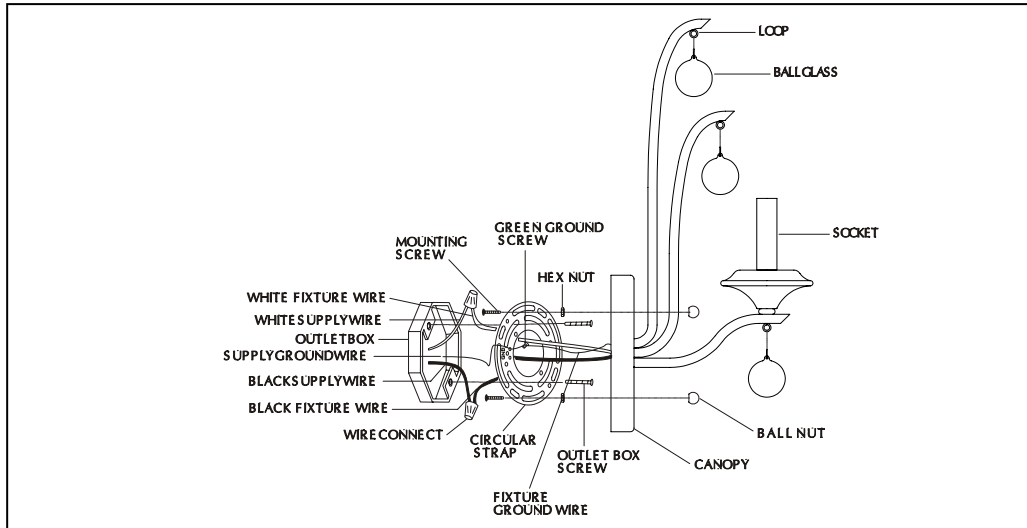

Installation Steps

PREPARATION

1. Shut off power at the fuse box or circuit breaker box. If necessary, remove old fixture and all mounting hardware from wall Outlet Box.
2. Carefully unpack your new Fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.

MOUNTING THE FIXTURE

1. The Circular strap contains several pairs of threaded holes. Find the pair of holes that match the hole spacing in your fixture Canopy and thread the two Mounting screws part way into the Circular strap. Adjust the length of the mounting screws, and then tighten with the Hex nuts.
2. Place the Circular strap over the Outlet box so the Mounting screws are vertical or horizontal, as required by fixture type. Holding the Strap in place, secure to the Outlet box by threading the two Outlet box screws, through the slotted holes.
3. Connect the Wires as described under "Connecting the Wires."
4. Place the fixture Canopy over the two Mounting screws so they protrude through the holes in the Canopy, Thread the Ball nuts onto the Mounting screws and continue turning until the Fixture is snug against the wall. (See) "Completing the Installation".

CONNECTING THE WIRES

Connect the Fixture Wires to the Supply Wires. Make sure all wire connectors are secure. If there is no Green Ground Wire from the Outlet Box, connect the Fixture Ground Wire to the Circular Strap with the Green Screw provided.

COMPLETING THE INSTALLATION

1. Hook Ball glasses to Loop of decorative arms.
2. Install the light bulb to Socket in accordance with the fixture's specifications.

DO NOT EXCEED THE MAXIMUM WATTAGE RATING!

3. Turn on the power at fuse or Circuit Box.