

# REVELATION


by UTTERMOST

## ASSEMBLY INSTRUCTIONS

STYLE#:R21323

*Carefully unpack all lamp parts from the carton.*

1. Take the chandelier carefully out of the carton and place it on a flat surface.
2. Be sure the power to the installation point is power off. This chandelier must be installed on reinforced **outlet box**.  
The safety cable must be attached to a stud in the ceiling.
3. Decide how much chain is needed for installation. Using chain pliers remove additional links and use enclosed quick links and bottom of the chain to secure. Hand tighten quick links before hanging.
4. Thread supply wires through the tube. Connect tube and nipple on the chandelier. Hand tighten until connection is secure.
5. Secure the **Plastic Connectors** to the ceiling according to the position of **Hole #3** and **Hole #4** on both side of **Universal Bar**.
6. Pull the wire from the **Canopy** and through the center hole in the **Universal Bar**.
7. The power supply wire consists of three wires, one black wire, one white wire and one silver ground wire.  
Connect the wires as shown.  
**A.** Connect the House Ground Wire to the Fixture Ground Wire.  
**B.** Connect the House White (or Ribbed) Wire to the Fixture Supply Wire (White or Ribbed Side).  
**C.** Connect the House Black (or Red) Wire to the Fixture Supply Wire (Black or Smooth Side).  
**D.** Wrap each connected wire with Wire Connector and carefully stuff all of the connected wires into the Outlet Box.
8. Thread the **Screw** onto **Hole #1** downside on both side of the **Universal Bar**. Then Thread the other two Screws onto **Hole #2** and **Hole #4** upside separately and secure them into the **Plastic Connector**.
9. Thread another two **Screws** through **Hole #2** upside on both side of the **Universal Bar**, and secure them into the **Outlet Box**.
10. Secure the **Screw** out form **Hole #1** with **Hex Nut**. Then Secure the **Mounting Ball** onto the **Screw**. Secure the **Hex Nut** and **Mounting Ball** on the other side the same way.
11. Install correct bulbs based on fixture markings and/or labels for maximum wattage.

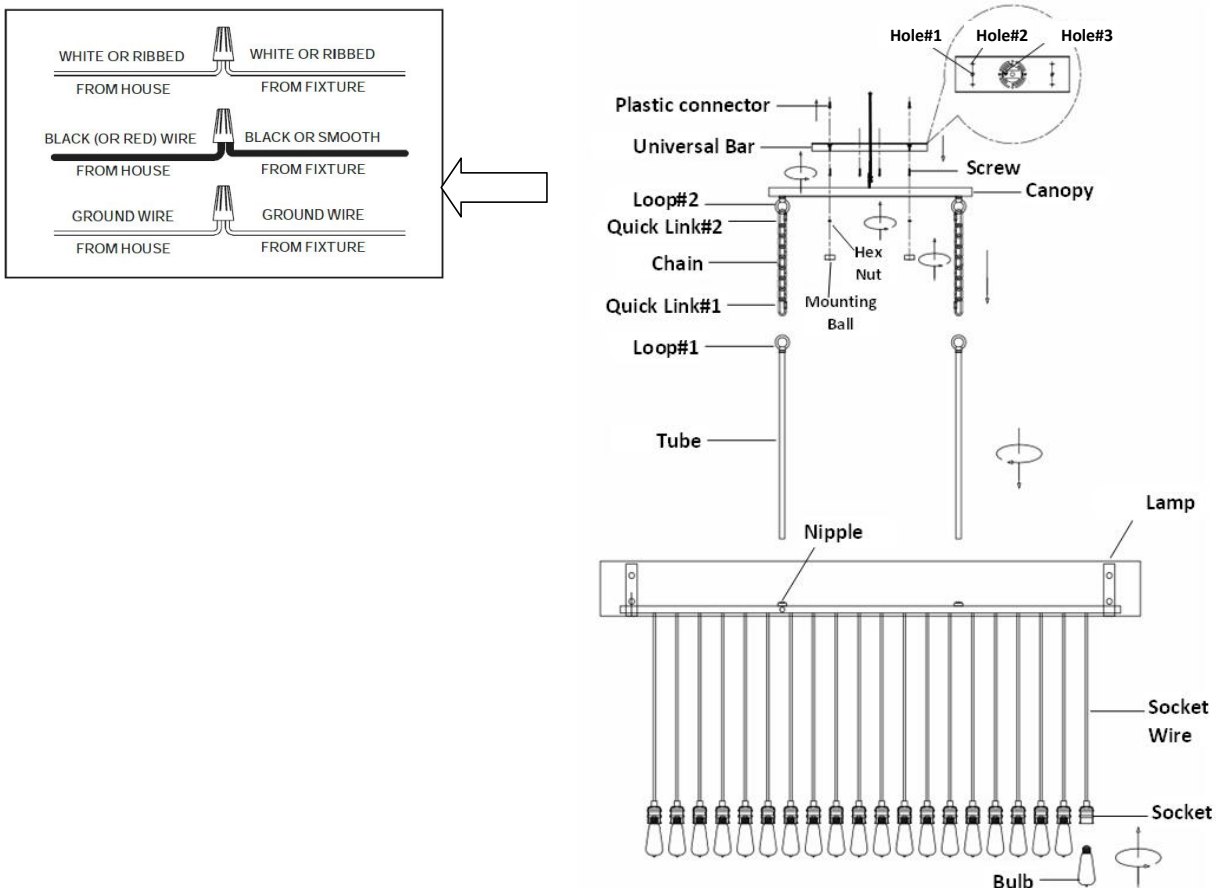

# REVELATION

## INSTALLATION INSTRUCTION FOR SAFETY CABLE INSTALLATION

### IN INSTRUCTION:

THIS FIXTURE IS PROVIDED WITH A SAFETY CABLE. THE SAFETY CABLE PROVIDES A BACK UP SYSTEM OF THE FIXTURE'S FRAME AND THE INSTALLATION HARDWARE. IT IS ESSENTIAL THAT THE SAFETY CABLE BE PROPERLY INSTALLED. THE CABLE MUST BE SECURED TO A STRUCTURAL MEMBER OF THE BUILDING, AND NOT TO THE OUTLET BOX. THE CABLE MUST BE TERMINATED WITH CLAMP'S SPECIFICALLY SIZED FOR THE CABLE. IF THE U-CLAMPS ARE USED, THEY MUST BE ORIENTATED AS PER THE DRAWING BELOW. IF THE CABLE HAS A PLASTIC COVERING, IT MUST BE REMOVED FROM THE AREA WHERE THE CLAMPS ARE MOUNTED. MAKE SURE ALL HARDWARE IS PROPERLY TIGHTENED AND THAT THE CABLE IS POSITIONED CLEAR OF ANY OBSTRUCTIONS.

### CORRECT APPLICATION

