





REVELATION

by UTTERMOST

ASSEMBLY INSTRUCTIONS

Illustration

STYLE NO. : R21596

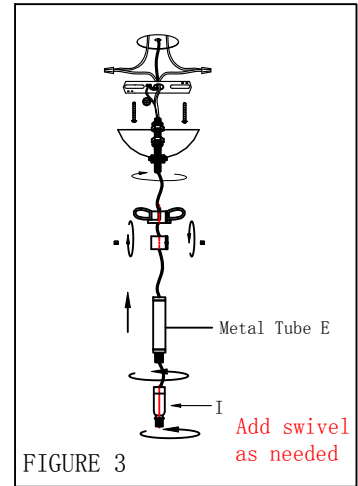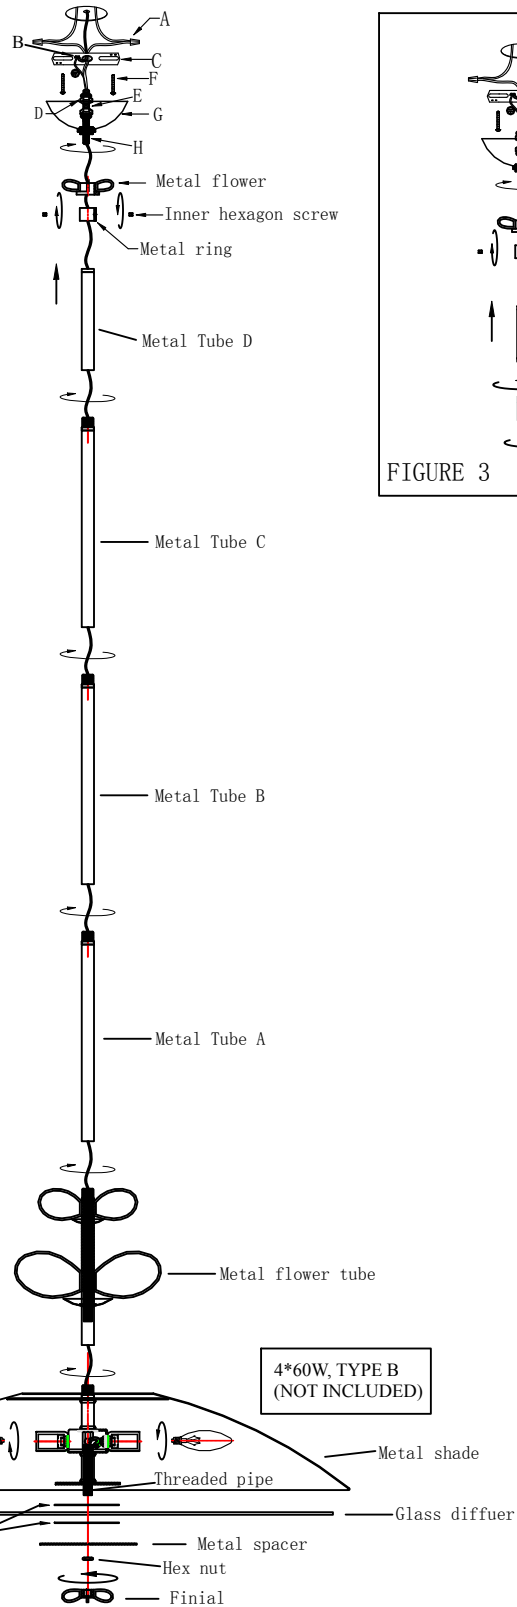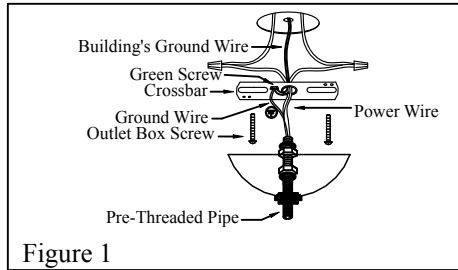

REVELATION

by UTTERMOST

ASSEMBLY INSTRUCTIONS

STYLE NO. : R21596

Parts and Hardware List

A.	Wire Nut	3PCS
B.	Green Ground Screw	1PC
C.	Crossbar	1PC
D.	Hex Nut	2PCS
E.	Pre-Threaded Pipe	1PC
F.	Outlet Box Screw	2PCS
G.	Canopy	1PC
H.	Pre-threaded Ring	1PC
I.	Swivel	1PC

Please make sure that you have all the parts indicated before you begin assembling this item.

WARNING: BEFORE INSTALLING, make sure the electricity supply is shut off to avoid a possible electric shock. We suggest a licensed electrician for all lighting fixture installations.

Please read Wiring Instructions before you begin assembling and installing your lamp.

Assembly Instruction

1. Carefully remove the parts and hardware from the carton.
2. Fasten the Crossbar (C) onto the Outlet Box by using the Outlet Box Screws (F).
3. Insert the shorter end of the Pre-Threaded Pipe (E) into the pre-drilled hole in the Crossbar (C) and secure with the Hex Nuts (D). (See illustration)
4. Attach the Pre-threaded Ring (H) to the exposed end of the Pre-Threaded Pipe (E) and secure by turning in a clockwise direction.
5. Add swivel (I) as needed, unscrew and loosen the metal ring, put the metal ring on the metal tube E; screw the swivel on end of metal tube E, another end of swivel to screw on one end of the metal tube D. (See Figure 3) If you don't need swivel, you can screw the metal tube D and metal flower on canopy directly.
6. Adjust the length of the wire needed for your installation, remove excess, determine the number of Rods to be assembled to the Fixture Body as needed for your hanging height, then screw Metal flower tube onto the metal shade until tight.
7. Repeat the Step 6 with the Metal Tube A, B, C and D as needed for your installation height.
8. Install both ground wires in the Crossbar (C) with the Green Ground Screw (B) supplied.
9. Place the white wire, ribbed or tinted wire evenly against the white wire from the outlet box and place the black, smooth or un-tinted wire evenly against the black wire from the outlet box. (Connecting the Wires - See Figure 2)
10. After the wires are connected, tuck them carefully inside the outlet box. Place the Canopy (G) over the outlet box and secure with Pre-Threaded Ring (H).
11. Install 4*60W max, Type B bulbs (NOT INCLUDED) into the sockets of the fixture.
12. Attach the glass diffuser to the threaded pipe at bottom of metal shade, place the plastic washers and metal spacer above and below diffuser that refer to illustration drawing, then screw the hex nut and the finial clockwise onto the metal spacer until the diffuser is secured.