

## REVELATION ASSEMBLY INSTRUCTIONS


STYLE#: R22561

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

*Carefully unpack all lamp parts from carton. We suggest a licensed electrician for all fixture installations.*

1. Take the lamp carefully out of the Carton, and place on a flat surface.
2. Place the single screw on the wall where you want to install the wall lamp by using drill machine.
3. Hang the Wall Lamp to the wall screw by key hole made at the back of wall plate.
4. Install correct Bulbs (Not Included) referring to fixture markings and/or labels for maximum wattage.
5. Place Fabric Shade over the socket then tight the ring by hand turning clockwise to fix the shade.

PO BOX 558/3325 GRASSY HILL RD, ROCKY MOUNT, VIRGINIA 24161  
www.ultarmost.com

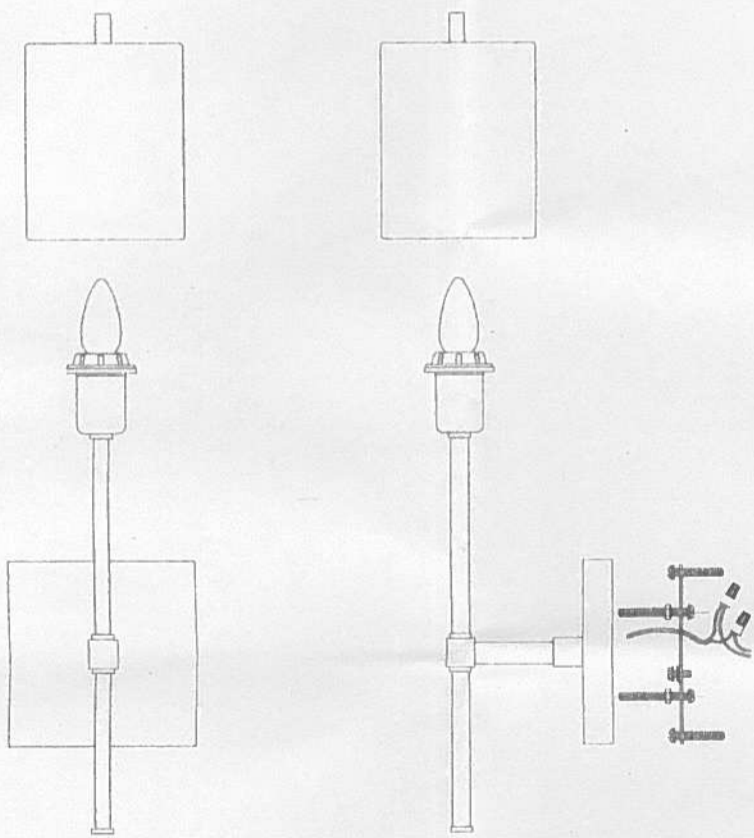

## REVELATION ASSEMBLY INSTRUCTIONS


STYLE#: R22561

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

*Carefully unpack all lamp parts from carton. We suggest a licensed electrician for all fixture installations.*

1. Take the lamp carefully out of the Carton, and place on a flat surface.
2. Be sure power to the installation point is OFF.
3. Pull the power supply wire out from the outlet box and mount the Universal Bar to the outlet box with Outlet Box Screws.
4. Connect the wire as shown.
  - a. Connect the House Ground Wire to the Fixture Ground Wire, secure with wire nut.
  - b. Connect the House White (or Ribbed) Wire to the Fixture Supply Wire (White or Ribbed Side), secure with wire nut.
  - c. Connect the House Black (or Red) Wire to the Fixture Supply Wire (Black or Smooth Side), secure with wire nut.
  - d. Carefully stuff all of the connected wires into the Outlet Box.
5. Attach Canopy over Universal Bar and secure with Screw. Tighten until snug with screwdrivers.
6. Install correct Bulbs (Not Included) referring to fixture markings and/or labels for maximum wattage.
7. Place Fabric Shade over the socket then tight the ring by hand turning clockwise to fix the shade.

Your installation is completed now. Restore electricity.



PO BOX 558/3325 GRASSY HILL RD, ROCKY MOUNT, VIRGINIA 24161  
www.ultarmost.com